



**EN QuickLink to USB interface kit installation guide**

**NL QuickLink to USB interface kit installatie voorschriften**


**1 Package contents**  
*Inhoud verpakking*

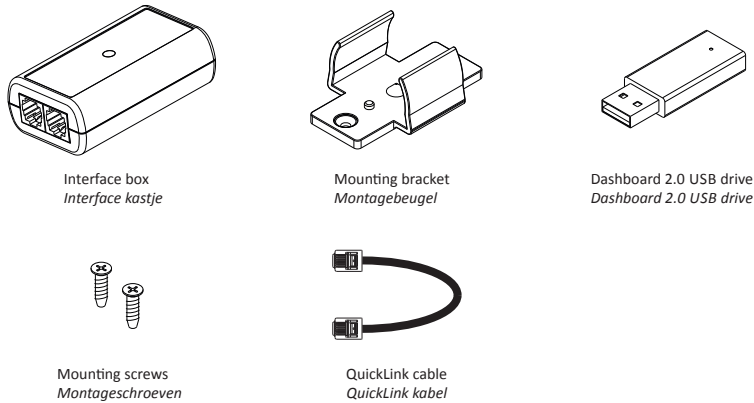


**2 Install Dashboard software + drivers**  
*Installeer Dashboard software + drivers*

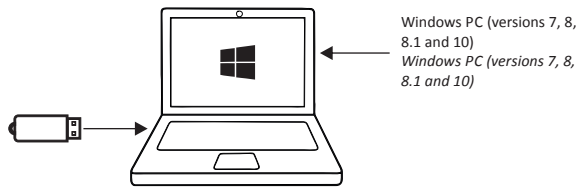

**3 Mounting the interface box**  
*Montage van het interfacekastje*



**4 Connecting the interface box**  
*Aansluiten van het interfacekastje*

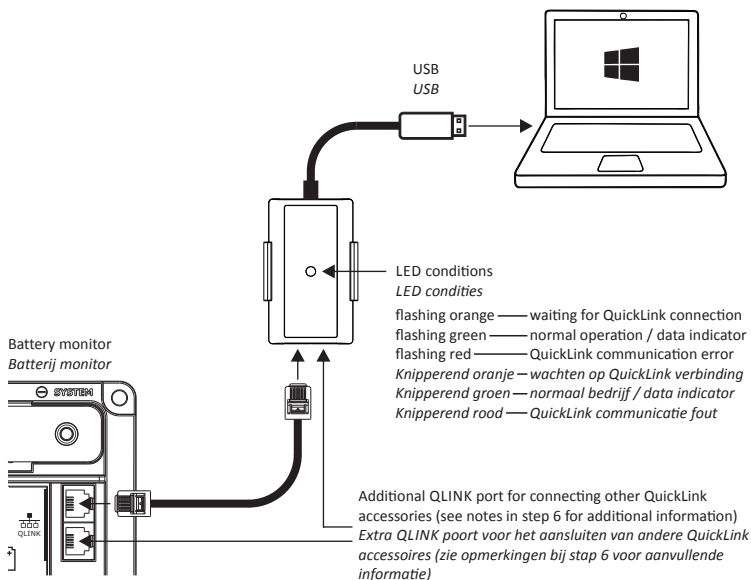


**5 Running the Dashboard software**  
*Het starten van de Dashboard software*



When the Samlex device is connected to the computer and powered up, it should appear automatically in the device list on the left side (see below).

*Wanneer het Samlex apparaat met de computer verbonden en ingeschakeld is, zou deze automatisch in de apparaten lijst aan de linkerkant moeten verschijnen (zie hieronder).*

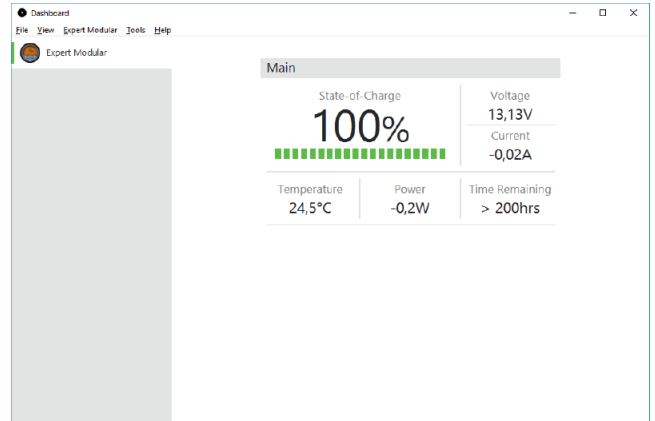

**6 Specifications plus notes**  
*Specificaties en opmerkingen*

Technical specifications isolated USB interface box	
Communication bus type	Samlex Quicklink
Current consumption	1.8mA max. (USB)
Isolation value	1000Vrms for 3 sec.
Operating ambient temp.	-20 ... +50 °C
Dimensions (L x W x H)	74 x 43 x 25mm

Notes:

- Each QuickLink network may contain only one master device (i.e. battery monitor)
- Each QuickLink network may contain only one communication interface.

Opmerkingen:

- Elk QuickLink netwerk mag maar één master unit (bv. batterij monitor) bevatten*
- Elk QuickLink netwerk mag maar één communicatie interface bevatten*